


#909



3/4" YARD HYDRANT

Valve and Working Parts of Brass—Positive Automatic Drain
Closes Against the Pressure—No Reaction

Removal of nozzle and top cap permits withdrawal of interior
Parts for replacement with ease and without digging up
or disturbing connection to supply pipe.

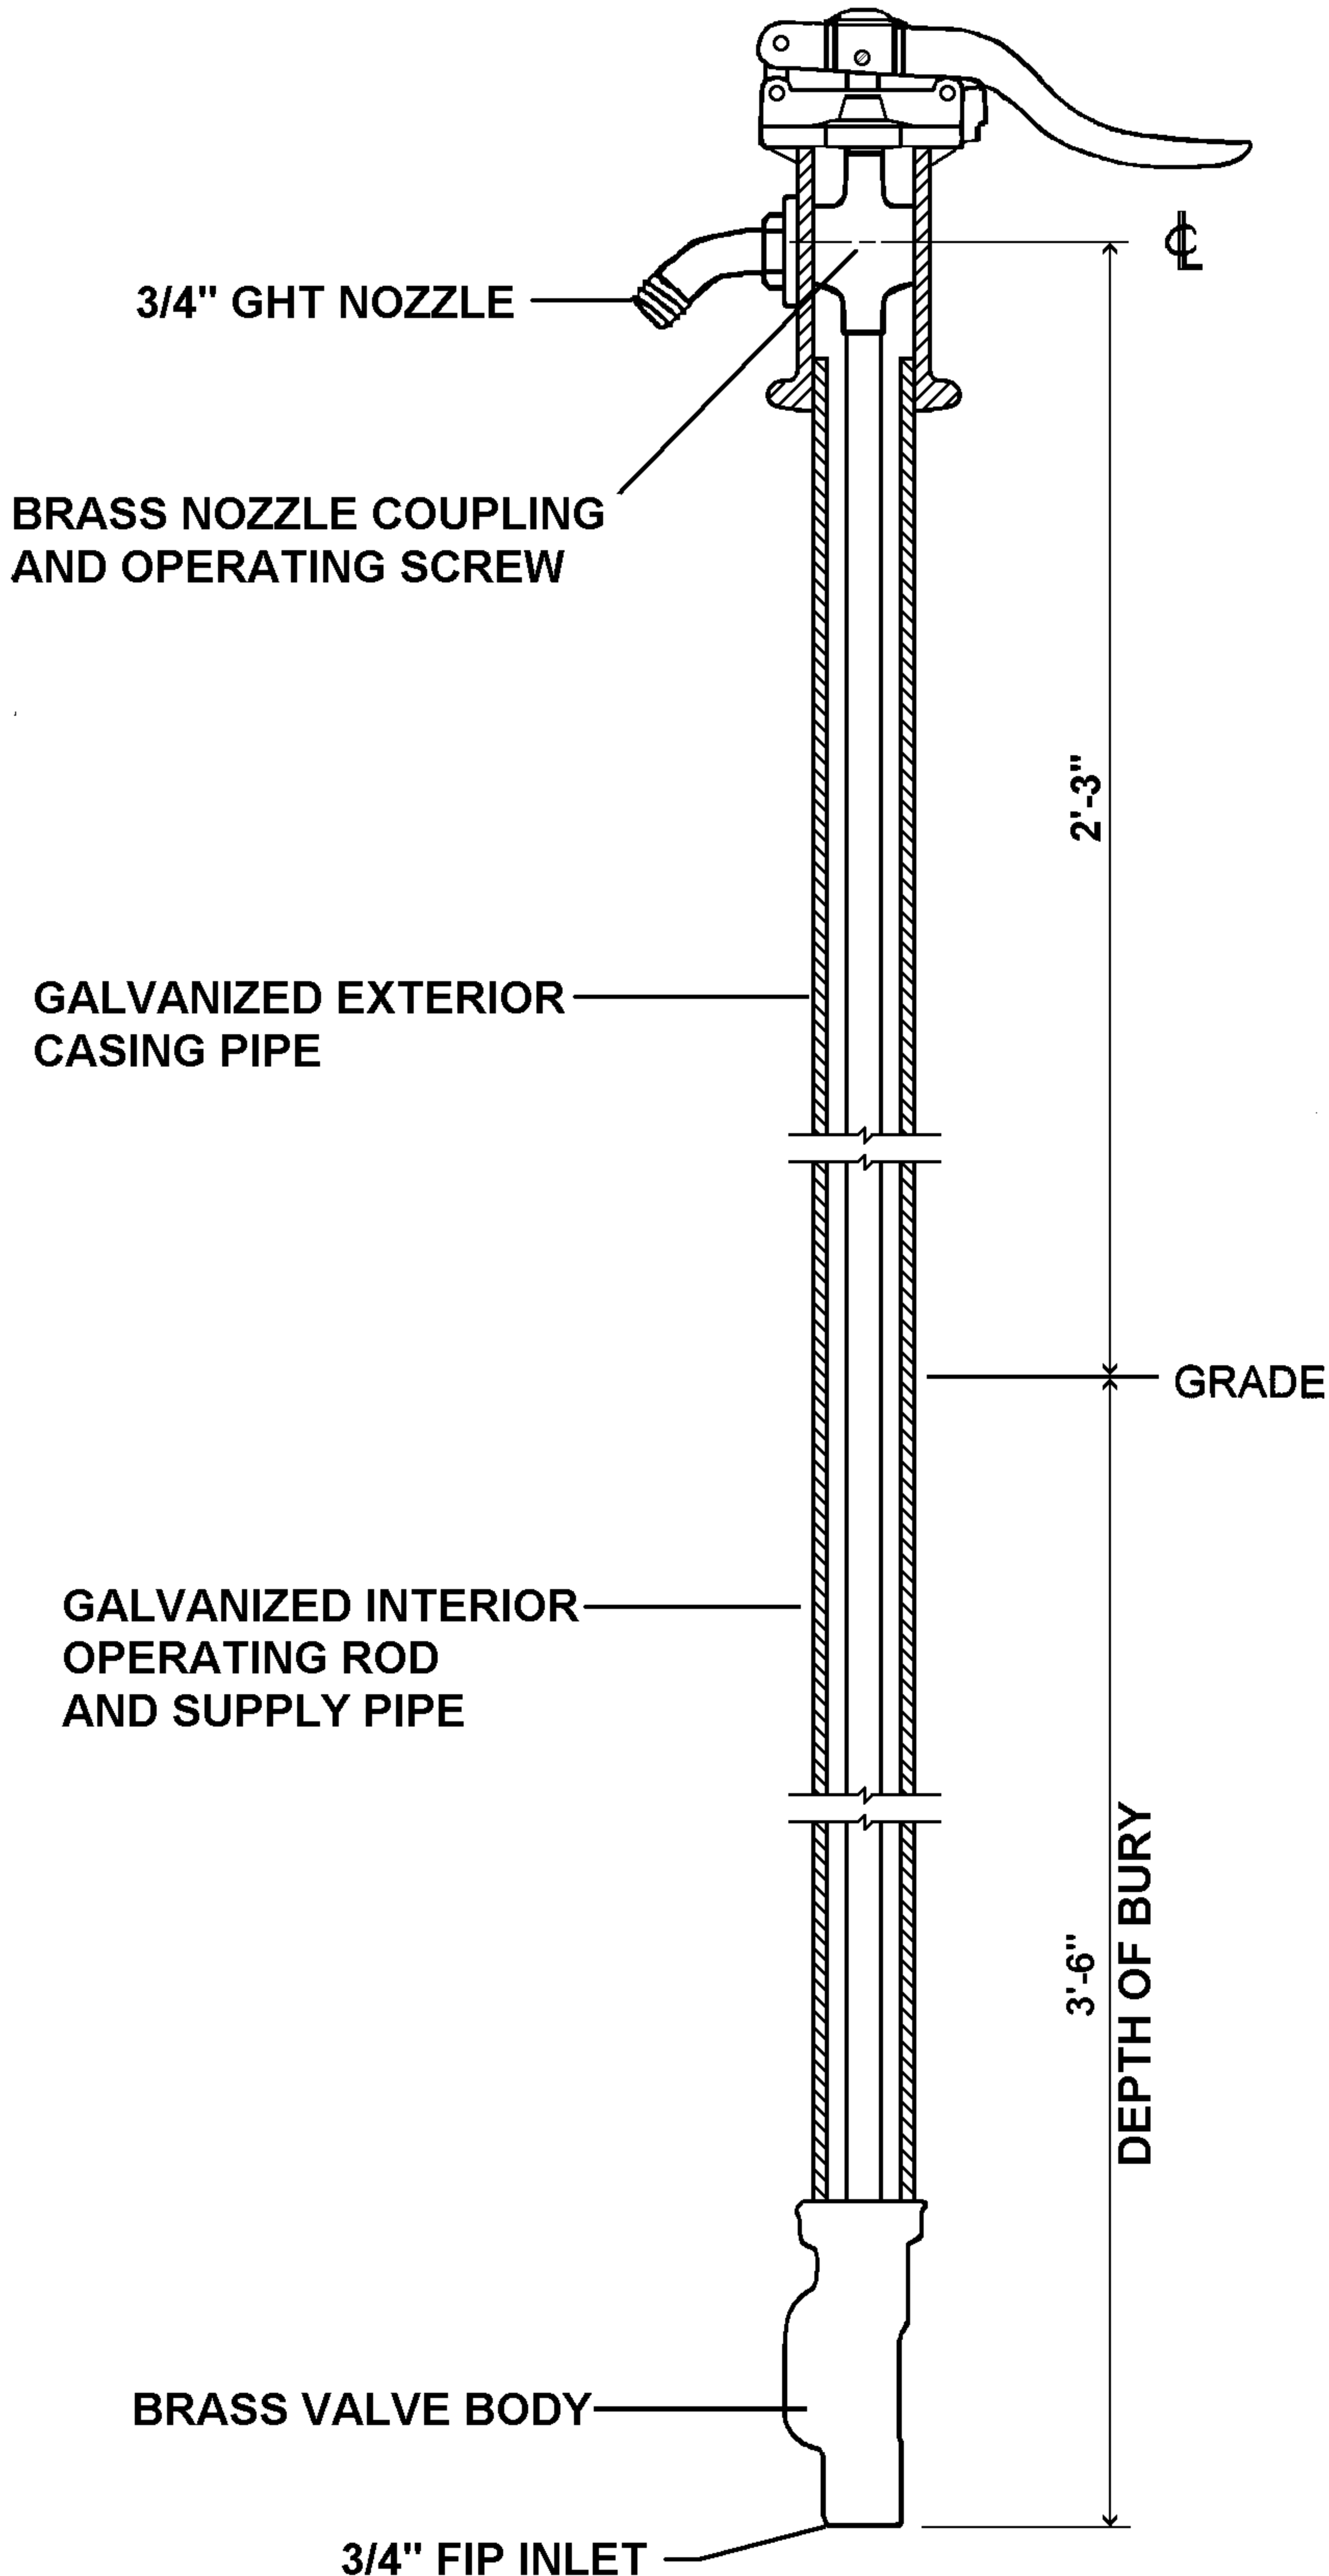


The Plunger operates up and down without twisting movement or torsional strain. When water is admitted into the Valve, the drain outlet is completely sealed by the Cup Washer on the Plunger, without waste of water

When the Valve is closed after operating, the drain outlet is unsealed or opened, allowing all water in the stand-pipe to escape, preventing the possibility of freezing.

Total Eclipse Hydrants and Street Washers involve the employment of "dry and wet" pipe principals of construction.

The outer or "dry" pipe establishes connection between the Nozzle Section at the top and Brass Valve Body at the bottom and encloses and protects the inside parts. The Inner or "wet" pipe connects the Brass Nozzle Coupling with the Valve Plunger, affording unrestricted passage for the water to the Brass Nozzle Outlet and conserving the water.

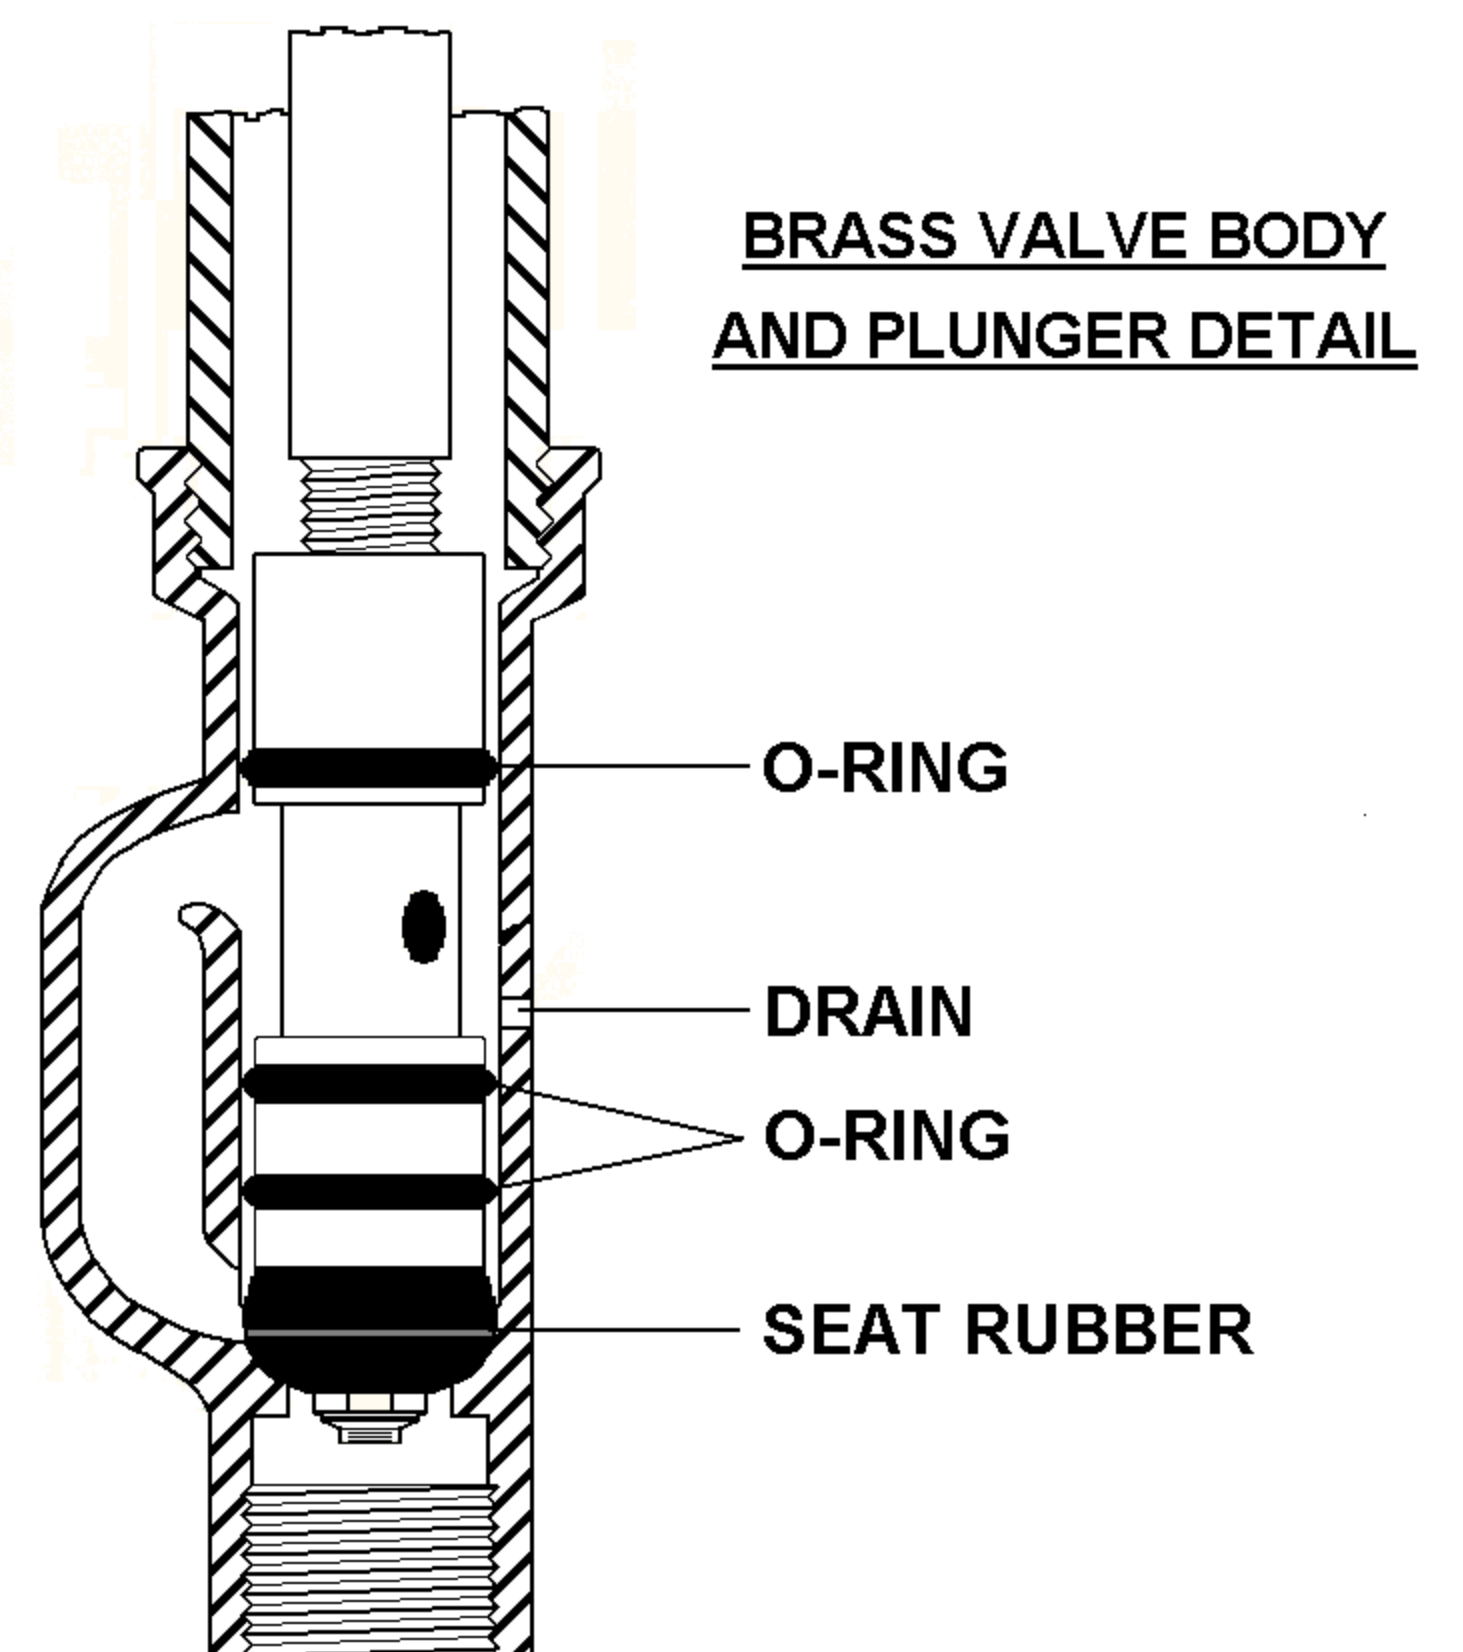

ECLIPSE
TRADEMARK
FOUNDRY
Since 1857



KUPFERLE FOUNDRY COMPANY

2511 N. 9TH STREET, ST. LOUIS, MO 63102
(314) 231-8738 FAX (314) 231-2820 (800) 231-3990