


5100 Continuous Flusher

FOR PERMANENT INSTALLATIONS

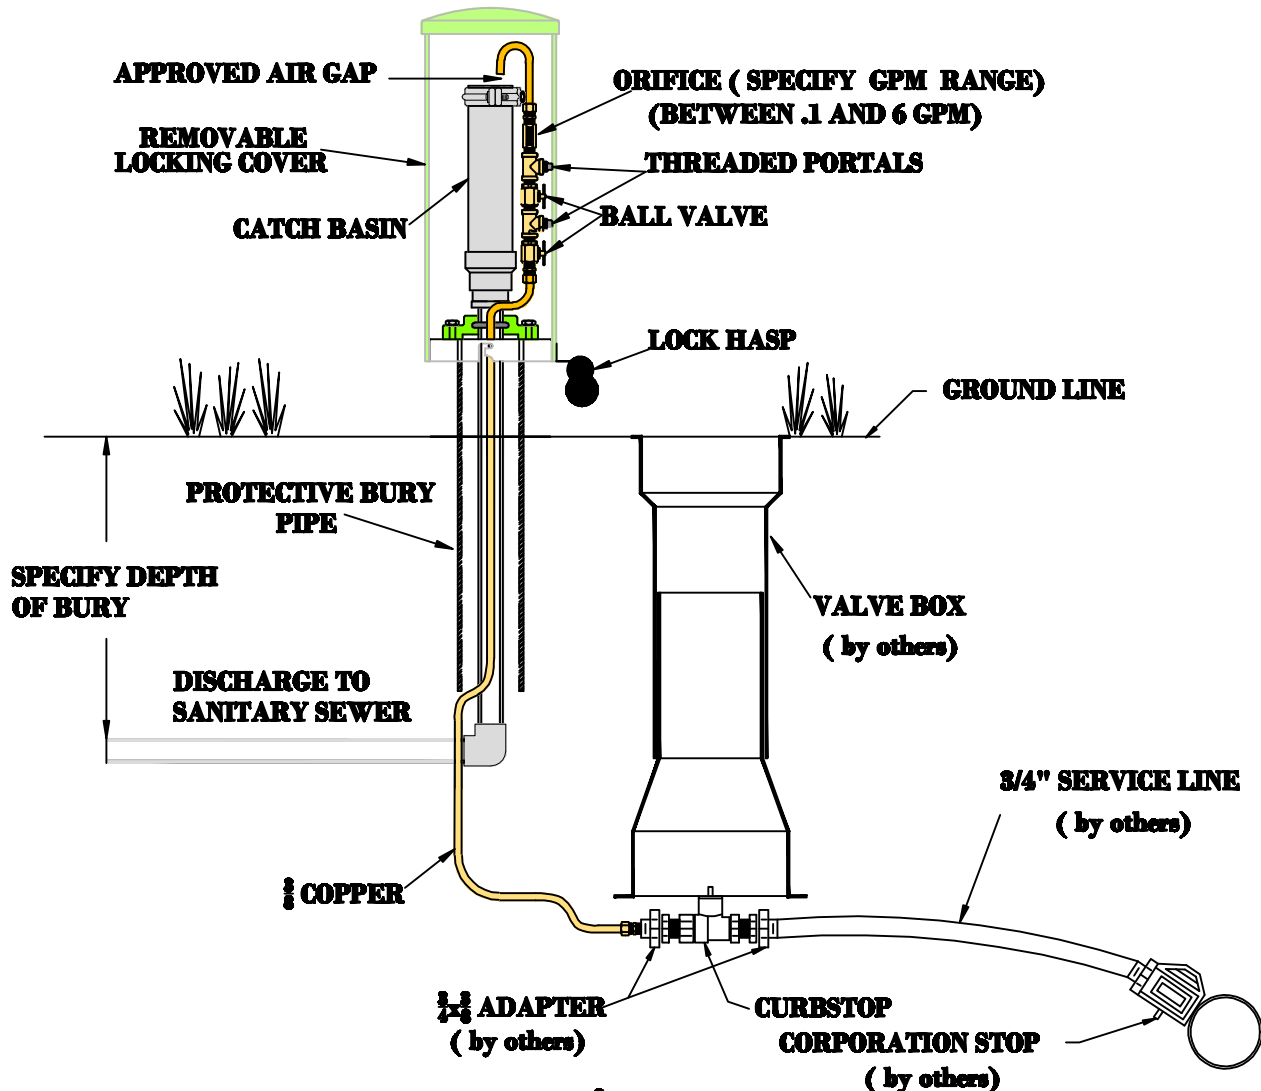

Continuous flusher shall be _____' bury with a $\frac{3}{8}$ " male threaded inlet connection. Water shall flow from inlet upward into an all-brass waterway consisting of a ball valve, a threaded portal, another ball valve, another treaded portal, an orifice, and a gooseneck. The orifice shall control the flow of water to maintain a constant flow of _____ GPM. (between .1 and 6 GPM) Water will then flow downward into a catch basin after passing through an air gap. Catch basin shall lead into a 1" female PVC outlet, discharging underground and piped into the sanitary sewer. All above-ground components shall be housed in a lockable, removable, UV protected plastic cover. Below ground components will be housed in a 3" protective steel pipe, as manufactured by Kupferly Foundry, St. Louis, Mo.. Model # 5100, or approved equal.

ECLIPSE
TRADEMARK REGISTERED Since 1857