


MAINGUARD 4" BLOW-OFF



BLOW-OFFS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH A _____' DEPTH OF BURY. BLOW-OFFS WILL BE FURNISHED WITH A 4" OR 6" MJ INLET, A NON-TURNING OPERATING ROD AND SHALL OPEN TO THE LEFT. THE OPERATING DRIVE MECHANISM SHALL BE OF BRONZE-TO-BRONZE DESIGN WITH AN ALUMINUM PLUNGER AND BE SERVICEABLE FROM ABOVE GRADE WITH NO DIGGING. UNITS SHALL OPERATE WITH A STANDARD 2" GATE VALVE WRENCH. WHEN OPEN, VALVE SHALL BE 100% UNOBSTRUCTED AND DRAIN HOLE SHALL BE COVERED. THE OUTLET SHALL BE 4" FIP WITH PLUG AND EXTEND A MINIMUM OF 12" ABOVE THE GROUND, AS MANUFACTURED BY KUPFERLE FOUNDRY CO., ST. LOUIS, MO. MODEL #7500, OR APPROVED EQUAL.

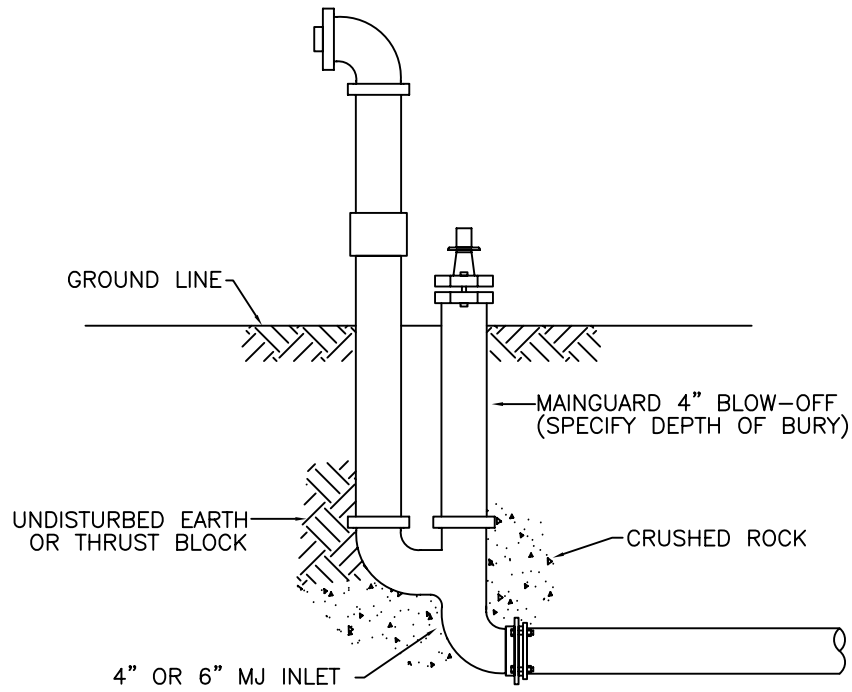