#7600 MAINGUARD BLOW-OFF

4" UNDERGROUND BLOW-OFF

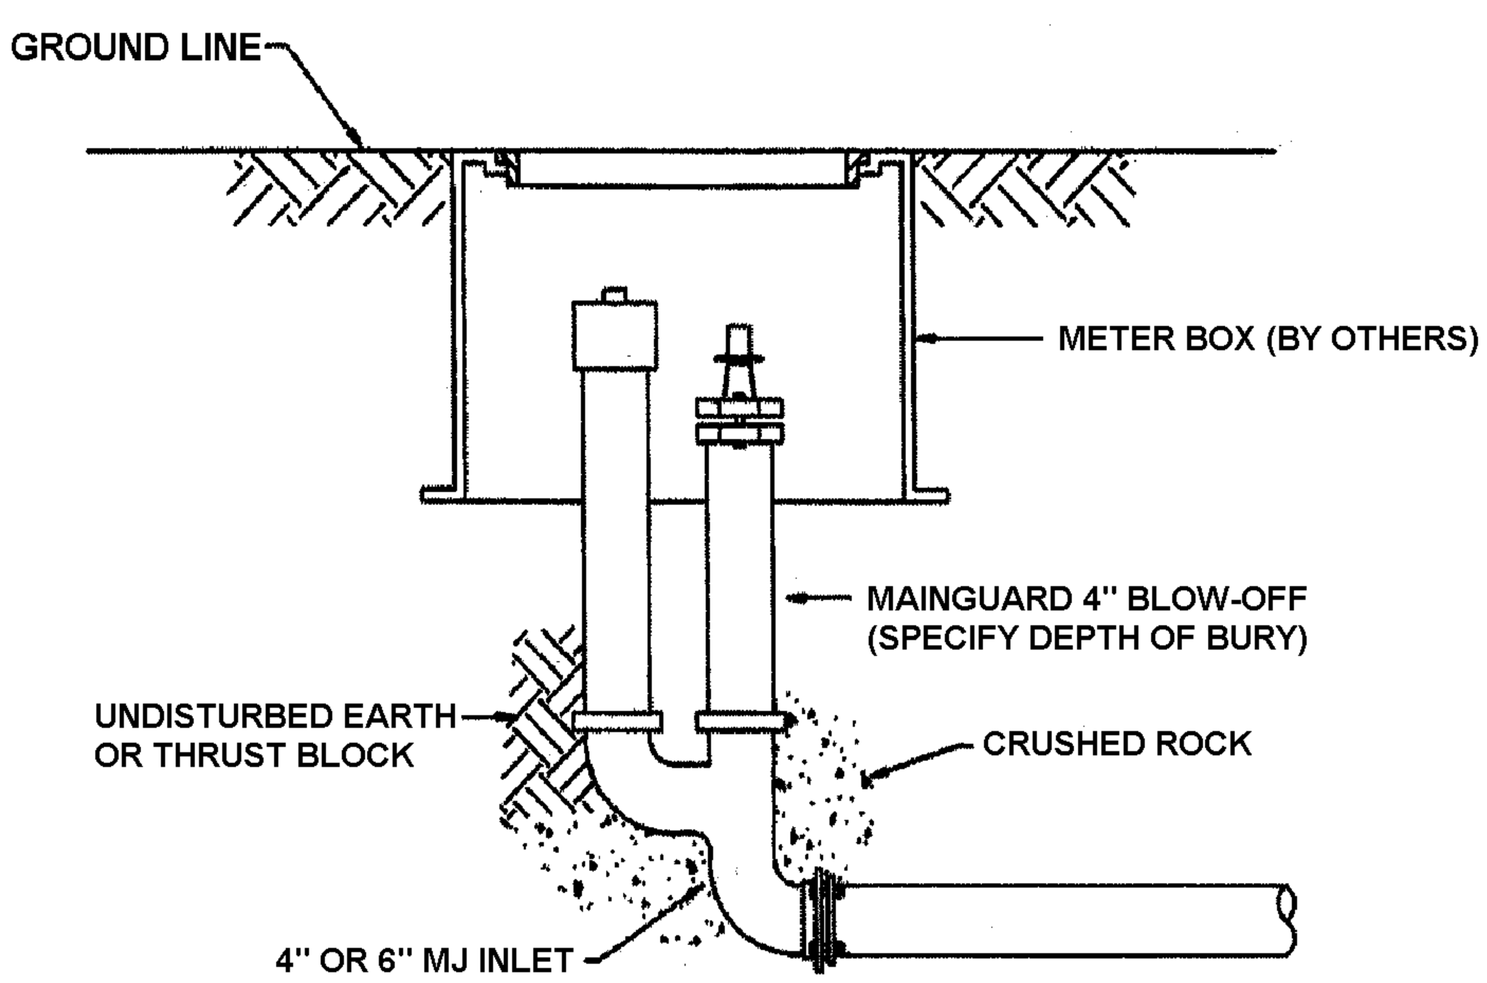

BLOW-OFFS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH A _____ ' DEPTH OF BURY, SET IN ___ METER BOXES. BLOW-OFFS WILL BE FURNISHED WITH A 4" OR 6" MJ INLET, A NON-TURNING OPERATING ROD AND SHALL OPEN TO THE LEFT. ALL OF THE WORKING PARTS SHALL BE BRASS TO BRASS DESIGN, AND BE SERVICEABLE FROM ABOVE GROUND WITH NO DIGGING. UNITS SHALL OPERATE WITH A STANDARD 2" GATE VALVE WRENCH. WHEN OPEN, VALVE SHALL BE 100 % UNOBSRUCTED AND DRAIN HOLE SHALL BE COVERED. THE OUTLET SHALL BE 4" FIP WITH PLUG AS MANUFACTURED BY KUPFERLE FOUDRY CO., ST. LOUIS, MO. MODEL #7600 OR APPROVED EQUAL.

ECLIPSE
TRADEMARK REGISTERED
Since 1857
KUPFERLE FOUNDRY COMPANY
813 HEMPSTEAD STREET, ST. LOUIS, MO 63102
(314) 231-8738 FAX 231-2820 (800) 231-3990