


9400-A AUTOMATIC 1" FLUSHING DEVICE (ALL-CLIMATE)

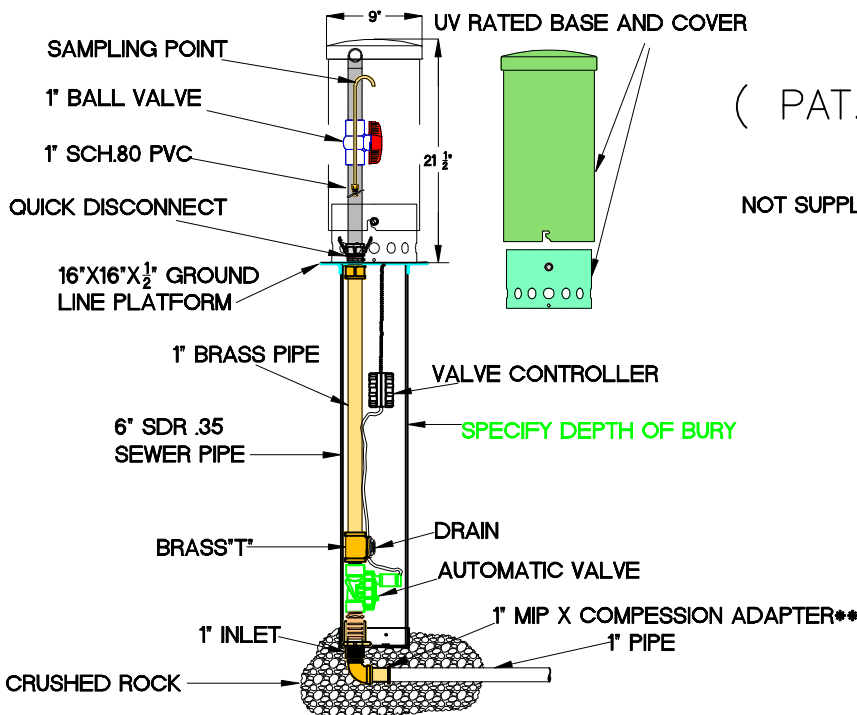

(PAT. NO. 5,921,270)

NOT SUPPLIED BY KUPFERLE **

AUTOMATIC FLUSHING DEVICE SHALL HAVE A 1" BRASS FIP INLET, LEADING VERTICALLY INTO A 1" AUTOMATIC SOLENOID VALVE. AUTOMATIC SOLENOID VALVE SHALL HAVE INTERNAL, SELF-CLEANING DEBRIS SCREEN, AND HAVE A 220 PSI RATING. EACH UNIT SHALL BE FURNISHED WITH A STAND-ALONE VALVE CONTROLLER. VALVE CONTROLLER WILL NOT REQUIRE A SECOND HAND-HELD DEVICE FOR PROGRAMMING, MUST HAVE A MINIMUM OF 9 POSSIBLE FLUSHING CYCLES PER DAY, SHALL BE SUBMERSIBLE TO 12 FEET, OPERATE WITH A 9 VOLT BATTERY AND HAVE RESIN-SEALED ELECTRICAL COMPONENTS. SOLENOID SHALL HAVE NO LOOSE PARTS WHEN REMOVED FROM VALVE. EACH UNIT SHALL HAVE A SINGLE-VALVE, ALL BRASS SAMPLING POINT. REMOVAL OF 1" SOLENOID VALVE SHALL BE POSSIBLE VIA AN O-RING CONNECTOR LOCATED UNDER THE VALVE AFTER REMOVAL OF STAINLESS STEEL ACCESS PLATE. UNDERGROUND PARTS SHALL BE HOUSED IN A PVC ENCLOSURE AND EACH UNIT SHALL BE SELF, NON FREEZING. ALL ABOVEGROUND COMPONENTS SHALL BE CONTAINED WITHIN A UV-RESISTANT LOCKING DOMED COVER, AS MANUFACTURED BY KUPFERLE FOUNDRY COMPANY MODEL ST. LOUIS, MO. 1-800-231-3990, OR APPROVED EQUAL.