


#9800-A AUTOMATIC FLUSHING DEVICE



ECLIPSE
TRADEMARK
REGISTERED
Since 1857

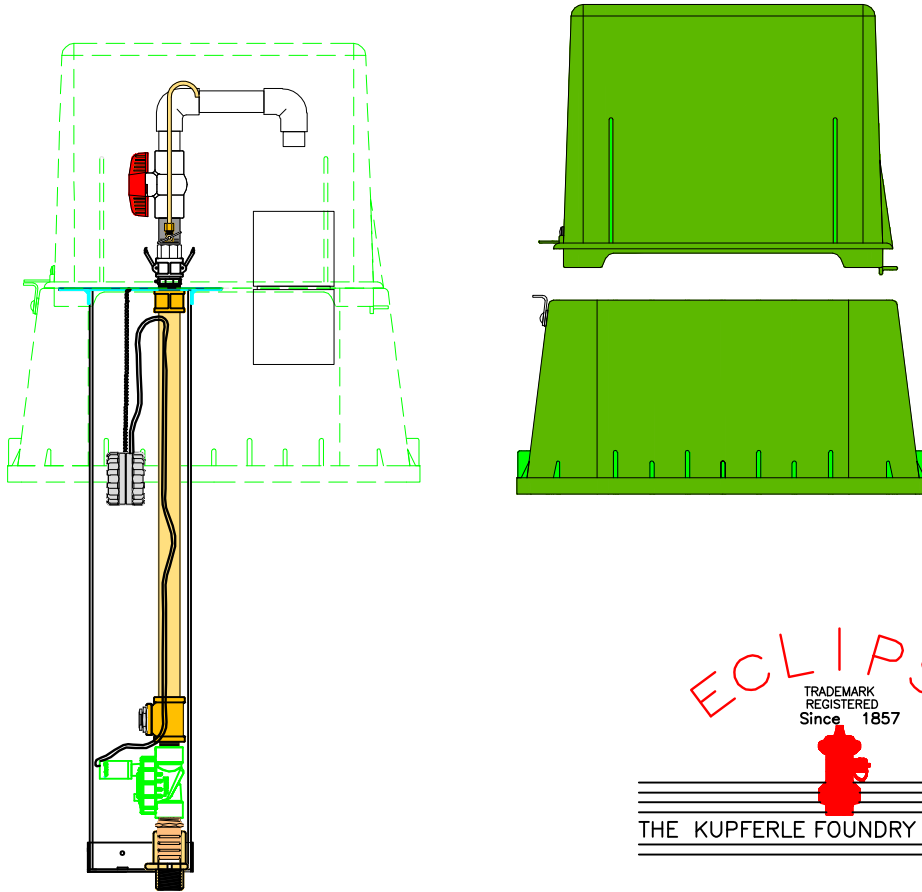

THE KUPFERLE FOUNDRY COMPANY

**AUTOMATIC FLUSHING DEVICE SHALL HAVE A 1" BRASS FIP INLET, LEADING VERTICALLY INTO A 1" AUTOMATIC SOLENOID VALVE. AUTOMATIC SOLENOID VALVE SHALL HAVE AN INTERNAL, SELF-CLEANING DEBRIS SCREEN, AND HAVE A 220 PSI RATING. EACH UNIT SHALL BE FURNISHED WITH A STAND-ALONE VALVE CONTROLLER. VALVE CONTROLLER WILL NOT REQUIRE A SECOND HAND-HELD DEVICE FOR PROGRAMMING. CONTROLLER MUST HAVE MINIMUM OF 9 POSSIBLE FLUSHING CYCLES PER DAY. SHALL BE SUBMERSIBLE TO 12 FEET, OPERATE WITH 9 VOLT BATTERY AND HAVE RESIN-SEALED ELECTRICAL COMPONENTS. SOLENOID HALL HAVE NO LOOSE PARTS WHEN REMOVED FROM VALVE. EACH UNIT SHALL HAVE A SINGLE-VALVE, ALL BRASS, SAMPLING POINT. REMOVAL OF 1" SOLENOID VALVE SHALL BE POSSIBLE VIA AN O-RING CONNECTOR LOCATED UNDER THE VALVE. AFTER REMOVAL OF STAINLESS STEEL ACCESS PLATE. VALVE ASSEMBLY SHALL BE HOUSED IN A PVC ENCLOSURE AND EACH UNIT SHALL BE SELF-DRAINING, NON-FREEZING, ALL ABOVE-GROUND COMPONENTS SHALL BE CONTAINED WITHIN A UV-RESISTANT LOCKING COVER, AS MANUFACTURED BY KUPFERLE FOUNDRY COMPANY.
MODEL#9800-A ST... LOUIS, MO. 1-800-231-3990, OR APPROVED EQUAL.**

Note: Flush water lines free of debris before installation