

ECLIPSE™ NO. 2A Post Hydrant


NON-FREEZING



- New full-port nozzle.
- One or two nozzles.
- Any size you wish up to 1 1/4" MIP, 1 1/2" MIP, 1 1/2" NST.

Available with any depth of bury you desire.

Inlet can be 1 1/4" or 1 1/2" FIP.


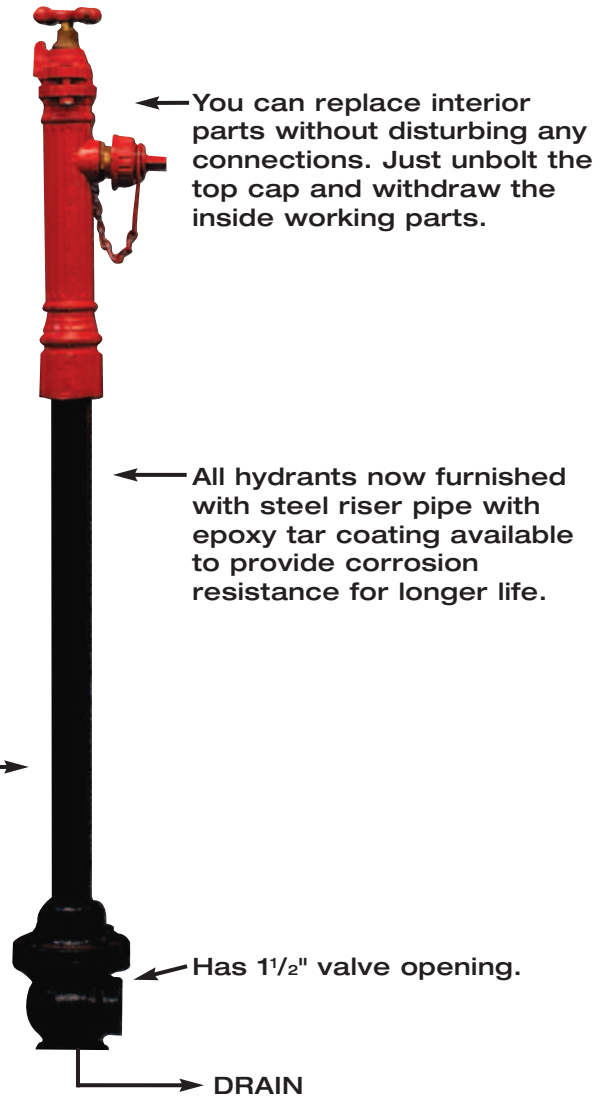


THE KUPFERLE FOUNDRY COMPANY
Since 1857
2511 NORTH 9TH STREET / ST. LOUIS, MISSOURI 63102
314-231-8738 FAX# 314-231-2820
<http://www.hydrants.com>


Call for Drawings
and Specs for
AutoCad
1-800-231-3990
(toll free)
or download
from website

Distributed by:

ECLIPSE™ NO. 2A Post Hydrant

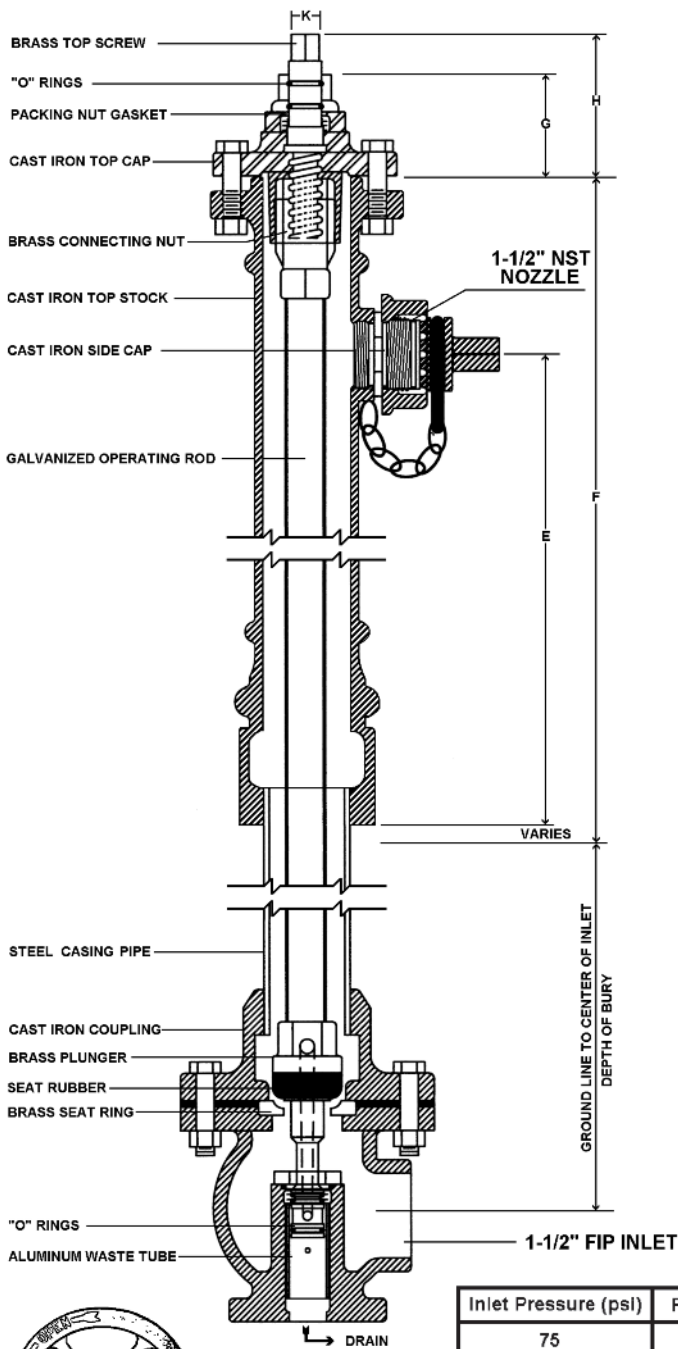

10" HANDWHEEL

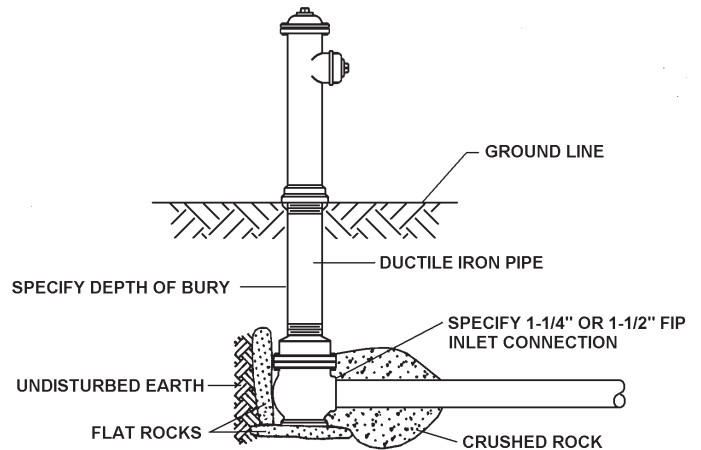

BLOW-OFF HYDRANTS SHALL BE ECLIPSE NO. 2A POST HYDRANTS AS MANUFACTURED BY JOHN C. KUPFERLE FOUNDRY CO., ST. LOUIS, MO

HYDRANTS SHALL BE SELF-DRAINING, NON-FREEZING, COMPRESSION TYPE WITH 1-1/2" MAIN VALVE OPENING. INLET CONNECTION SHALL BE 1-1/4" OR 1-1/2" FIP. OUTLET SHALL BE (3/4" GHT OR 1", 1-1/4", 1-1/2" MIP OR 1-1/2" NST).

HYDRANTS SHALL HAVE A 2" STEEL PIPE RISER WITH A CAST IRON STOCK TOP, AND NON-TURNING OPERATING ROD. PRINCIPAL INTERIOR OPERATING PARTS SHALL BE BRASS AND BE REMOVABLE WITHOUT EXCAVATING THE HYDRANT.

HYDRANTS SHALL BE SET IN 4 CUBIC FEET OF CRUSHED STONE TO ALLOW FOR PROPER DRAINAGE OF THE HYDRANT. RECOMMENDATIONS OF THE AWWA SHOULD BE FOLLOWED WHEN INSTALLING THE HYDRANT.

ECLIPSE POST HYDRANTS - NO. 2A

	DESCRIPTION	DIM.
A	DIAMETER OF VALVE OPENING	1 1/2"
B	DIAMETER OF CASING PIPE	2"
C	INSIDE DIAMETER OF NOZZLE	1 3/16"
D	OUTSIDE DIAMETER OF OPERATING ROD	1"
E	BOTTOM OF TOP STOCK TO OUTLET	13 3/4"
F	HEIGHT OF TOP STOCK	18 3/4"
G	HEIGHT TOP CAP	2"
H	BOTTOM OF TOP CAP TO TOP OF OPERATING SCREW	3 3/4"
J	HEIGHT OF BOTTOM INLET	6"
K	SIZE & SHAPE OF TOP SCREW NUT	5/8" ■

Inlet Pressure (psl)	Flow Rate (gpm)
75	290
100	337
125	375
150	413



2511 NORTH 9TH STREET / ST. LOUIS, MISSOURI 63102
 314-231-8738 FAX# 314-231-2820
<http://www.hydrants.com>

ECLIPSE

Call Toll Free
1-888-HYDRANT

